




## SMA Male to TNC Female, Adapter, RA18S33 DC-18GHz, Straight

### Dimensions(mm) Tolerance±1%

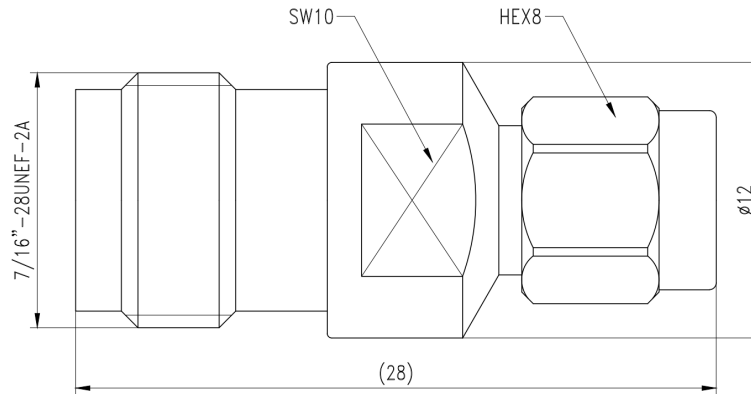

### Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max (互配测试)	Operating Temp	-55°C to +165°C
Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB		

### Mechanical & Product Information

Product Number	RA18S33, JP-Grade	Connector	SMA Male to TNC Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE

### Typical Test Data

