




SMA Female to TNC Female, Adapter, RA18S34FSH DC-18GHz, 4 hole flange

Dimensions(mm) Tolerance±1%

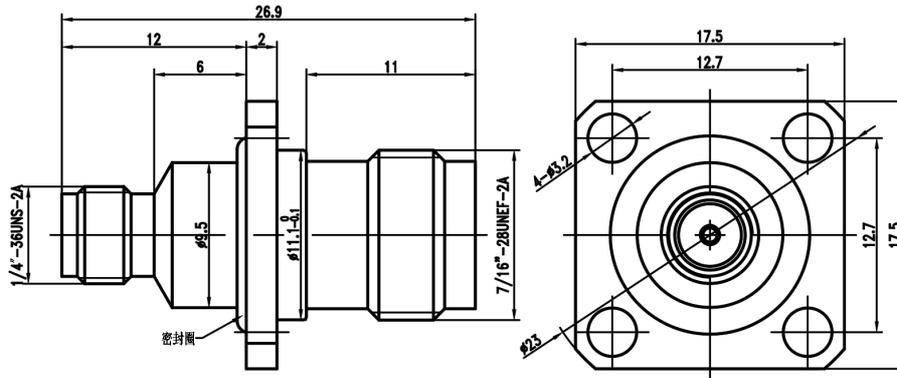

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.15	Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S34FSH, U-Grade, Sealing ring	Connector	SMA Female to TNC Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, 4 hole flange
Center Contact	1.27μm gold plated beryllium copper	Insulator	PTFE
Dimension	26.9(L)mm	Net Weight	About 10.6g

Typical Test Data

