




SMA Female to BMA Female, Adapter, RA18S37 DC-18GHz

Dimensions(mm) Tolerance $\pm 1\%$

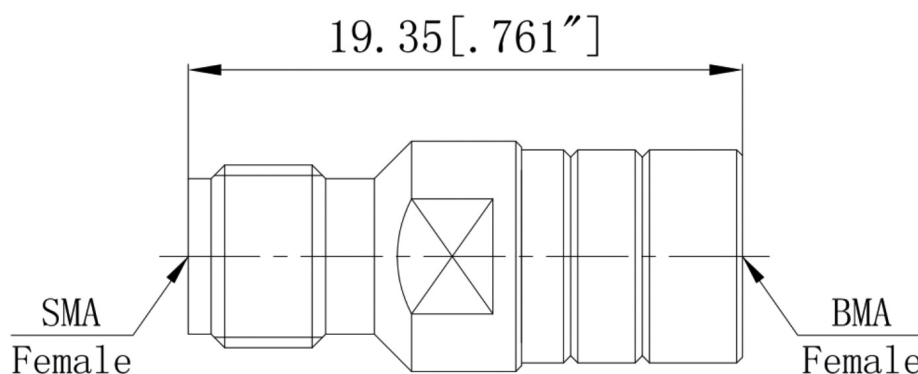

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	-
Mating Cycles	>500 Cycles	OT Range	-55°C to +165°C

Mechanical & Product Information

Product Number	RA18S37, P-Grade	Connector	SMA Female to BMA Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	19.35(L)mm	Net Weight	About 3.6g