




SMA Female to SSMP Male Full Detent, Adapter, RA18S40H DC-18GHz

Dimensions(mm) Tolerance $\pm 1\%$

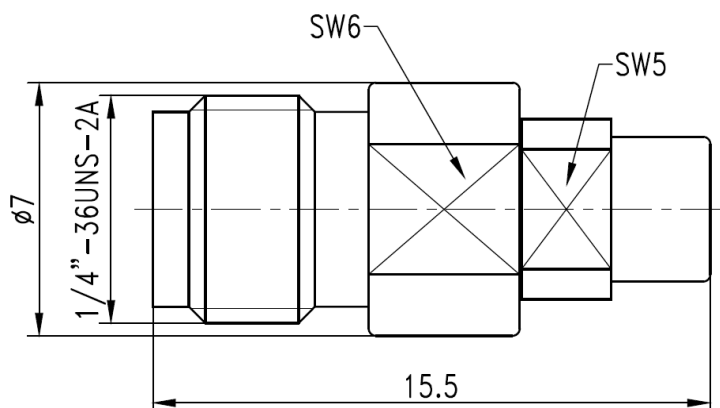

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max (互配测试)	Insertion Loss	0.25dB max $\leq 0.06\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S40H, U-Grade	Connector	SMA Female to SSMP Male Full Detent
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	15.5(L)*7(ϕ)mm	Net Weight	About 2.1g

Typical Test Data

