


## SMA Female to SSMP Female, Adapter, RA18S41 DC-18GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

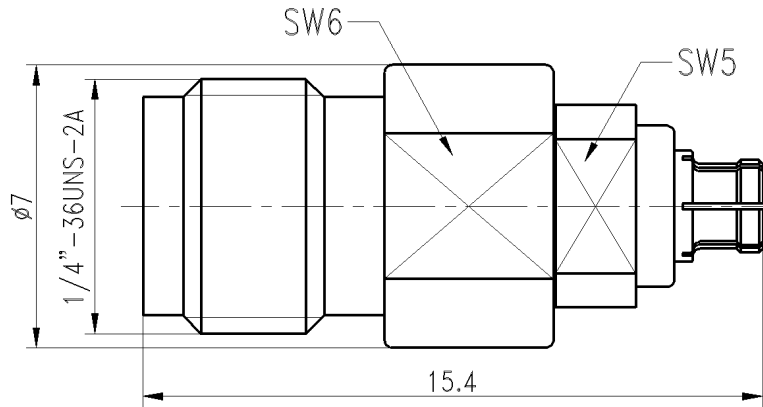

### Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Operating Temp	-55°C to +165°C

### Mechanical & Product Information

Product Number	RA18S41, JP-Grade	Connector	SMA Female to SSMP Female
Connector Body	Passivated stainless steel 316F & BeCu	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI&PTFE

