




SMA Male to SSMP Female, Adapter, RA18S42H DC-18GHz

Dimensions(mm) Tolerance±1%

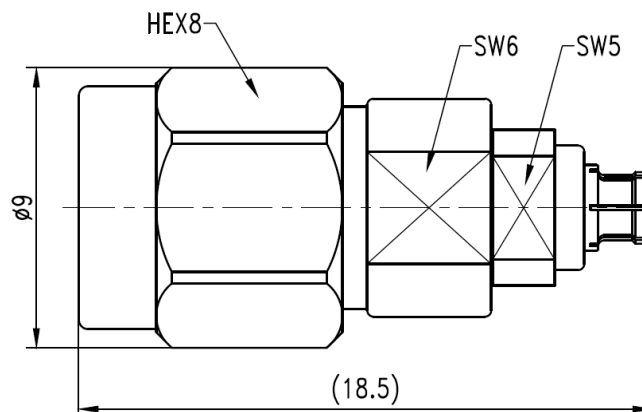

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max (互配测试)	Insertion Loss	0.25dB max $\leq 0.06\sqrt{f(\text{GHz})}\text{dB}$

Mechanical & Product Information

Product Number	RA18S42H, U-Grade	Connector	SMA Male to SSMP Female
Connector Body	Passivated stainless steel 316F & BeCu	Shape/Mounting	Straight, None
Center Contact	1.27μm gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	18.5(L)*9(φ)mm	Net Weight	About 3.6g

Typical Test Data

