




## SMA Female to SMA Female, Adapter, RA27S01FE

### DC-26.5GHz, 4 hole flange

#### Dimensions(mm) Tolerance $\pm 1\%$

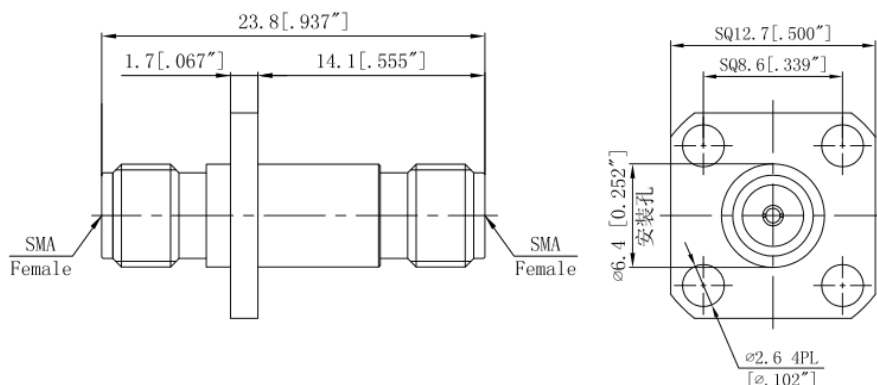

#### Electrical & Environmental

|                 |                                           |                |        |
|-----------------|-------------------------------------------|----------------|--------|
| Frequency Range | DC-26.5GHz                                | Impedance      | 50 ohm |
| VSWR            | 1.2 max (18-26.5GHz); 1.15 max (DC-18GHz) | Insertion Loss | -      |

#### Mechanical & Product Information

|                |                              |                |                          |
|----------------|------------------------------|----------------|--------------------------|
| Product Number | RA27S01FE, E-Grade           | Connector      | SMA Female to SMA Female |
| Connector Body | Passivated stainless steel   | Shape/Mounting | Straight, 4 hole flange  |
| Center Contact | Gold plated beryllium copper | Insulator      | PTFE                     |
| Dimension      | 23.8(L)mm                    | Net Weight     | -                        |

#### Typical Test Data

