


SMA Female to SMA Female, Adapter, RA27S01FSH02 DC-26.5GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

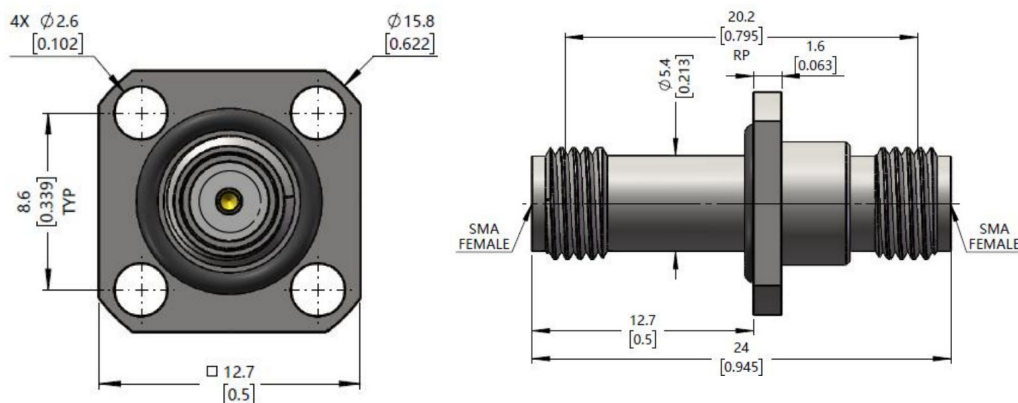

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.20dB max

Mechanical & Product Information

Product Number	RA27S01FSH02, JP-Grade, Sealing ring	Connector	SMA Female to SMA Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	24(L)mm	Net Weight	-