




## SMA Female to SMA Female, Adapter, RA27S01YS-2 DC-26.5GHz, Straight, Bulkhead

### Dimensions(mm) Tolerance±1%

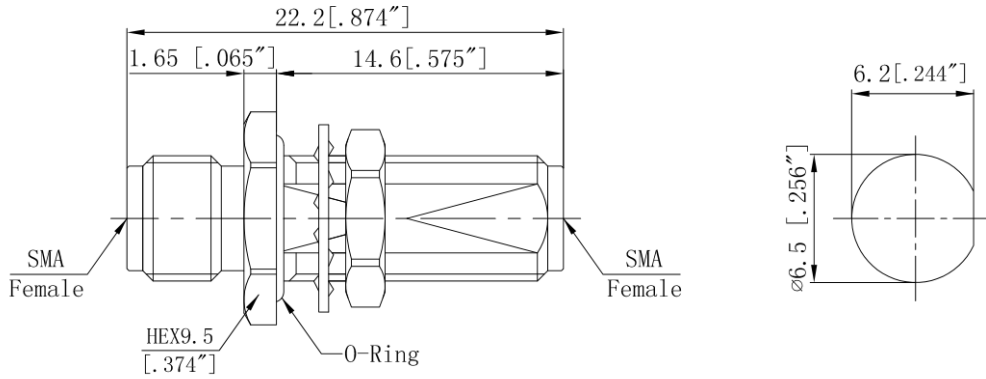

### Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max (18-26.5GHz); 1.15 max (DC-18GHz)	Operating Temp	-55°C to +165°C

### Mechanical & Product Information

Product Number	RA27S01YS-2, E-Grade, Sealing ring	Connector	SMA Female to SMA Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, Bulkhead
Center Contact	Gold plated beryllium copper	Insulator	PTFE

### Typical Test Data

