




SSMA Female to SSMA Female, Adapter, RA27SA01F DC-26.5GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

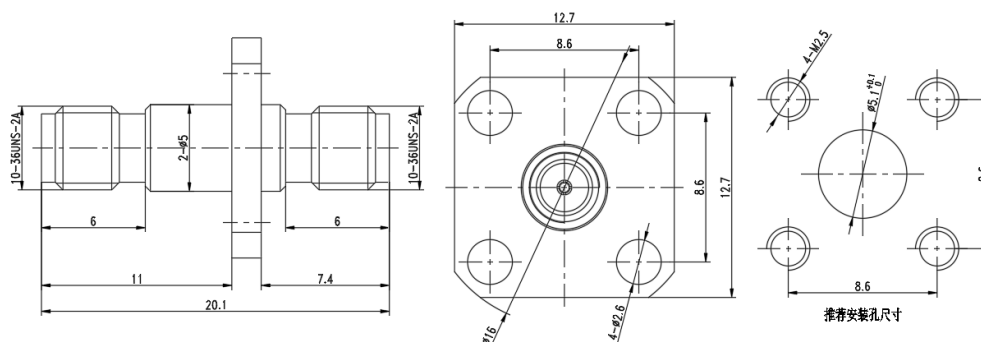

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.15	Insertion Loss	0.55dB max $\leq 0.1\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA27SA01F, U-Grade	Connector	SSMA Female to SSMA Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, 4 hole flange
Center Contact	1.27μm gold plated beryllium copper	Insulator	PTFE
Dimension	20.1(L)mm	Net Weight	-

Typical Test Data

