


3.5mm Male to 3.5mm Male, Adapter, RA3402-2 DC-34GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

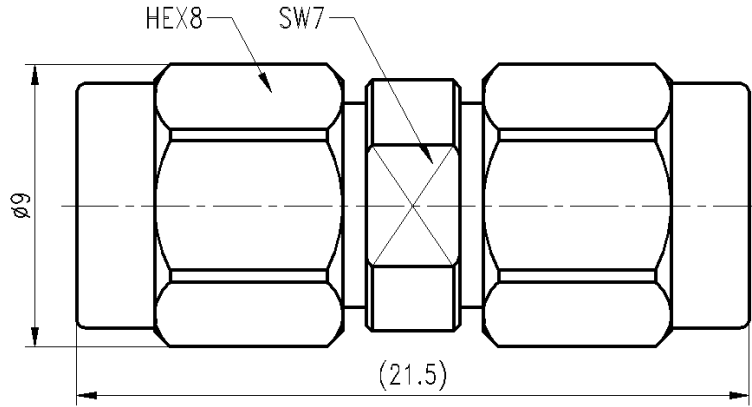

Electrical & Environmental

| | | | |
|------------------------|---|-----------------------|-----------------|
| Frequency Range | DC-34GHz | Impedance | 50 ohm |
| VSWR | 1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz) | Operating Temp | -55°C to +165°C |

Mechanical & Product Information

| | | | |
|-----------------------|---------------------------------|-----------------------|--------------------------|
| Product Number | RA3402-2, JP-Grade | Connector | 3.5mm Male to 3.5mm Male |
| Connector Body | Passivated stainless steel 316F | Shape/Mounting | Straight, None |
| Center Contact | 1.27um gold plated brass | Insulator | PEI |

