




## 3.5mm Male to 3.5mm Male, Adapter, RA3402H DC-34GHz

### Dimensions(mm) Tolerance $\pm 1\%$

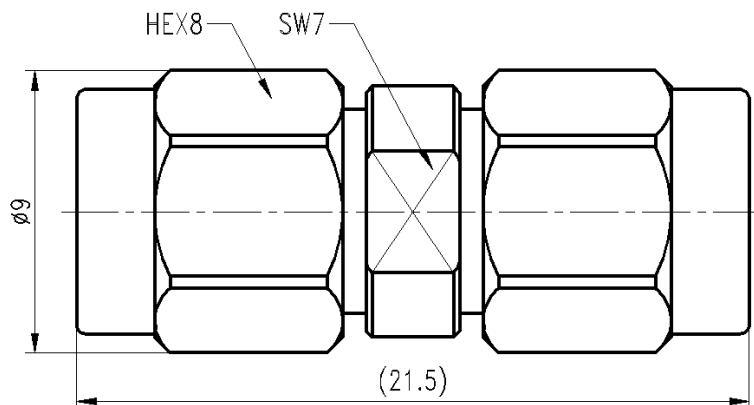

### Electrical & Environmental

|                 |                                             |                |        |
|-----------------|---------------------------------------------|----------------|--------|
| Frequency Range | DC-34GHz                                    | Impedance      | 50 ohm |
| VSWR            | 1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz) | Insertion Loss | -      |

### Mechanical & Product Information

|                |                                 |                |                          |
|----------------|---------------------------------|----------------|--------------------------|
| Product Number | RA3402H, JP-Grade               | Connector      | 3.5mm Male to 3.5mm Male |
| Connector Body | Passivated stainless steel 316F | Shape/Mounting | Straight, None           |
| Center Contact | 1.27um gold plated brass        | Insulator      | PEI                      |
| Dimension      | 21.5(L)*9( $\phi$ )mm           | Net Weight     | About 5.1g               |

### Typical Test Data

