




3.5mm Male to 3.5mm Male, Adapter, RA3402WH DC-26.5GHz Right Angle,

Dimensions(mm) Tolerance $\pm 1\%$

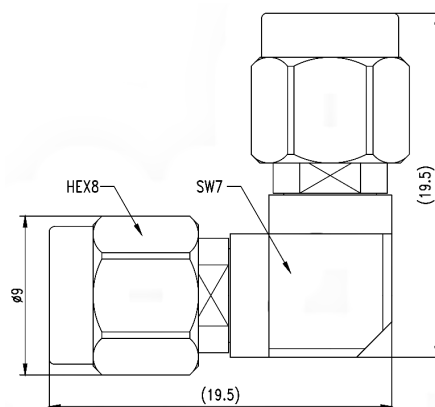

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.20dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA3402WH, JP-Grade	Connector	3.5mm Male to 3.5mm Male
Connector Body	Passivated stainless steel	Shape/Mounting	Right Angle, None
Center Contact	BeCu/Brass,Gold plating	Insulator	PTFE&PEI
Dimension	19.5(L)*19.5(W)*9(φ)mm	Net Weight	-

Typical Test Data

