




3.5mm Male to 3.5mm Female, Adapter, RA3403H DC-34GHz

Dimensions(mm) Tolerance $\pm 1\%$

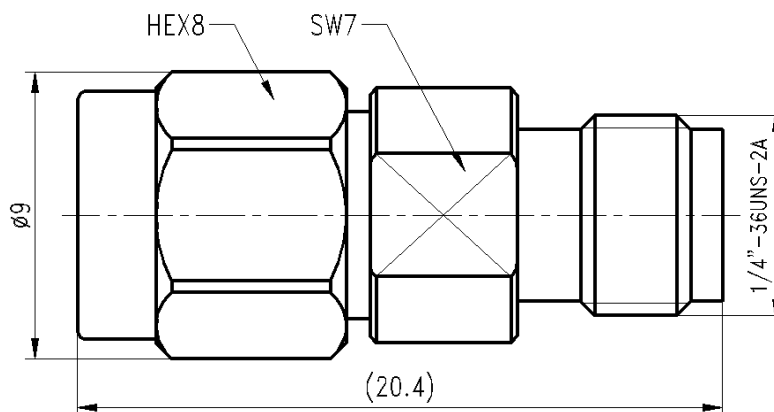

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz)	Insertion Loss	-

Mechanical & Product Information

Product Number	RA3403H, JP-Grade	Connector	3.5mm Male to 3.5mm Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	20.4(L)*9(ϕ)mm	Net Weight	About 4.2g

Typical Test Data

