


3.5mm Female to 2.92mm(K,SK) Female, Adapter, RA3404H DC-34GHz

Dimensions(mm) Tolerance $\pm 1\%$

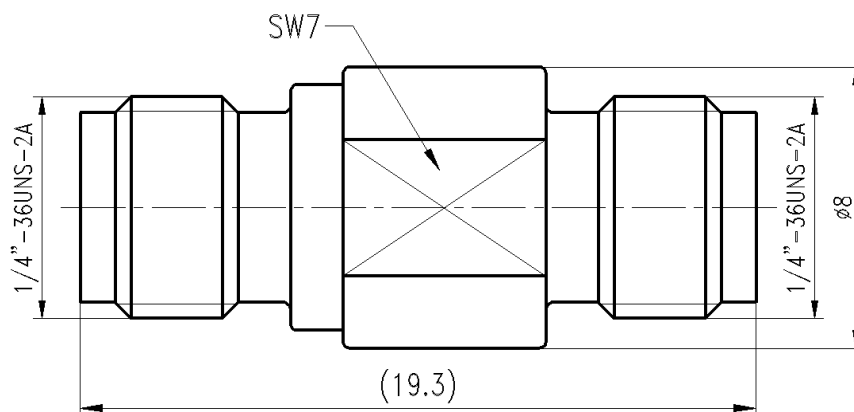

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz)	Insertion Loss	-

Mechanical & Product Information

Product Number	RA3404H, JP-Grade	Connector	3.5mm Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	19.3(L)*8(ϕ)mm	Net Weight	-