




## 3.5mm Female to 2.92mm(K,SK) Female, Adapter, RA3404 DC-34GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

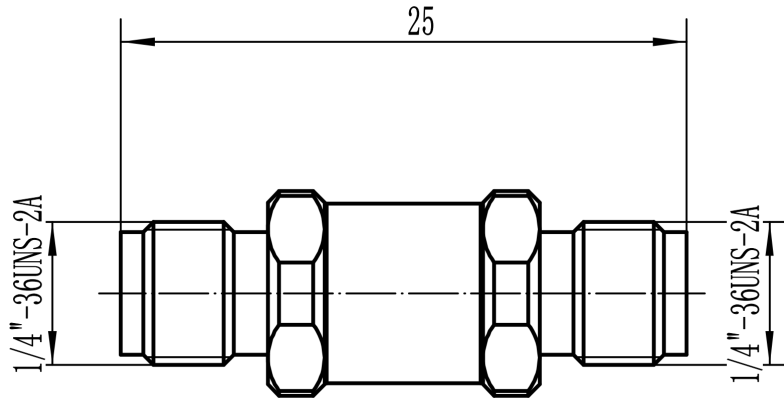

### Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.23dB max , Typ 0.18dB		

### Mechanical & Product Information

Product Number	RA3404, H-Grade	Connector	3.5mm Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

### Typical Test Data

