


3.5mm Male to 2.92mm(K,SK) Male, Adapter, RA3405H DC-34GHz

Dimensions(mm) Tolerance $\pm 1\%$

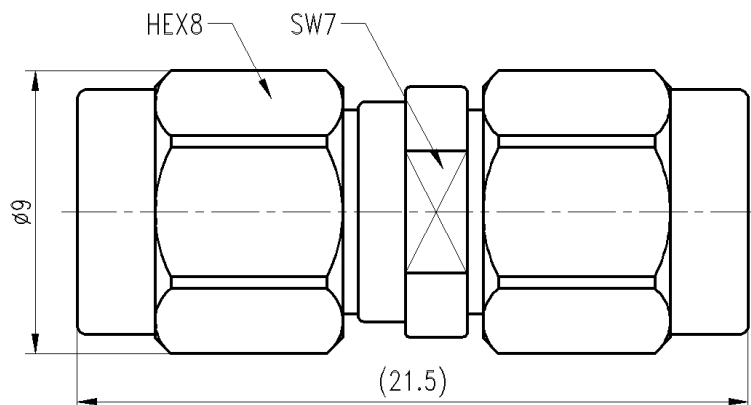

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz)	Insertion Loss	-

Mechanical & Product Information

Product Number	RA3405H, JP-Grade	Connector	3.5mm Male to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	21.5(L)*9(ϕ)mm	Net Weight	-