




2.92mm(K,SK) Male to 3.5mm Female, Adapter, RA3406H DC-34GHz

Dimensions(mm) Tolerance $\pm 1\%$

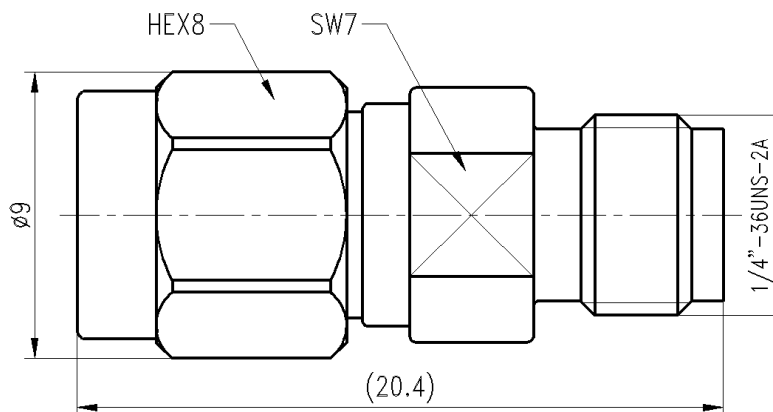

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.1	Insertion Loss	0.20dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA3406H, U-Grade	Connector	2.92mm(K,SK) Male to 3.5mm Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PEI
Dimension	20.4(L)*9(ϕ)mm	Net Weight	About 4.4g

Typical Test Data

