




3.5mm Female to 2.92mm(K,SK) Male, Adapter, RA3406 DC-34GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

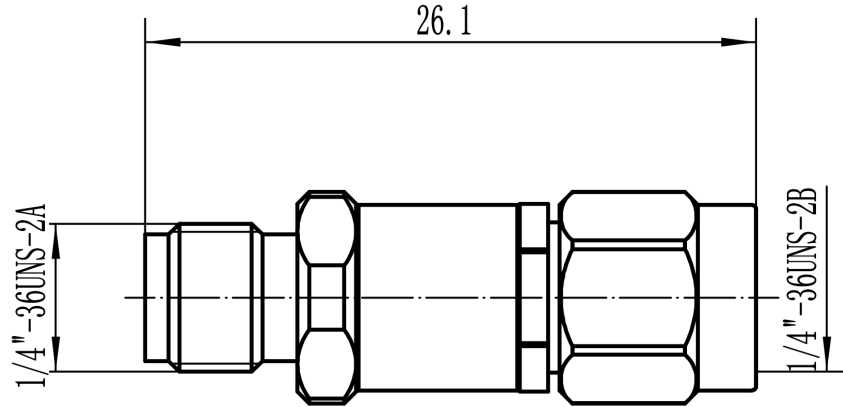

Electrical & Environmental

| | | | |
|-----------------|-------------------------|----------------|-----------------|
| Frequency Range | DC-34GHz | Impedance | 50 ohm |
| VSWR | 1.2 max | Operating Temp | -55°C to +165°C |
| Insertion Loss | 0.23dB max , Typ 0.18dB | | |

Mechanical & Product Information

| | | | |
|----------------|------------------------------|----------------|-----------------------------------|
| Product Number | RA3406, H-Grade | Connector | 3.5mm Female to 2.92mm(K,SK) Male |
| Connector Body | Passivated stainless steel | Shape/Mounting | Straight, None |
| Center Contact | Gold plated beryllium copper | Insulator | PEI |

Typical Test Data

