


## 3.5mm Female to 2.4mm Male, Adapter, RA3411H DC-34GHz

### Dimensions(mm) Tolerance $\pm 1\%$

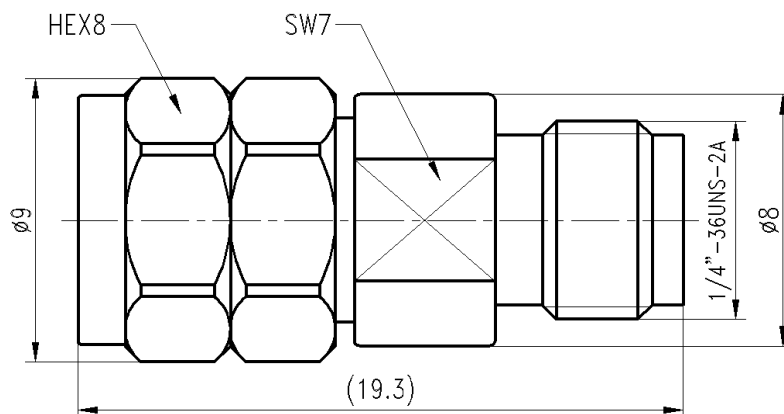

### Electrical & Environmental

|                 |                                             |                |        |
|-----------------|---------------------------------------------|----------------|--------|
| Frequency Range | DC-34GHz                                    | Impedance      | 50 ohm |
| VSWR            | 1.2 max (26.5-34GHz); 1.15 max (DC-26.5GHz) | Insertion Loss | -      |

### Mechanical & Product Information

|                |                                     |                |                            |
|----------------|-------------------------------------|----------------|----------------------------|
| Product Number | RA3411H, JP-Grade                   | Connector      | 3.5mm Female to 2.4mm Male |
| Connector Body | Passivated stainless steel 316F     | Shape/Mounting | Straight, None             |
| Center Contact | 1.27um gold plated beryllium copper | Insulator      | PEI                        |
| Dimension      | 19.3(L)*9( $\phi$ )mm               | Net Weight     | -                          |