




3.5mm Female to SMP(GPO) Female, Adapter, RA3412 DC-34GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

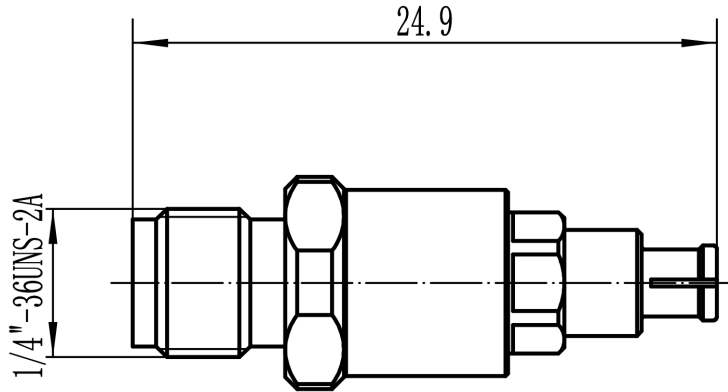

Electrical & Environmental

Frequency Range	DC-34GHz	Impedance	50 ohm
VSWR	1.3 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.30dB max , Typ 0.23dB		

Mechanical & Product Information

Product Number	RA3412, H-Grade	Connector	3.5mm Female to SMP(GPO) Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE

Typical Test Data

