




2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001FH DC-40GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

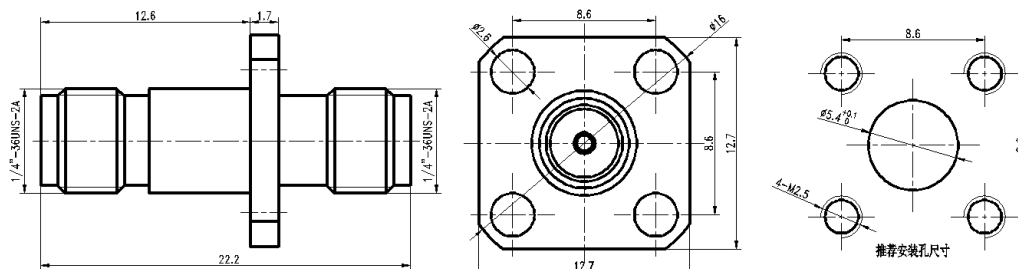

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.30dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4001FH, JP-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	22.2mm(L)mm	Net Weight	-

Typical Test Data

