




2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001FS2 DC-40GHz, Straight, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

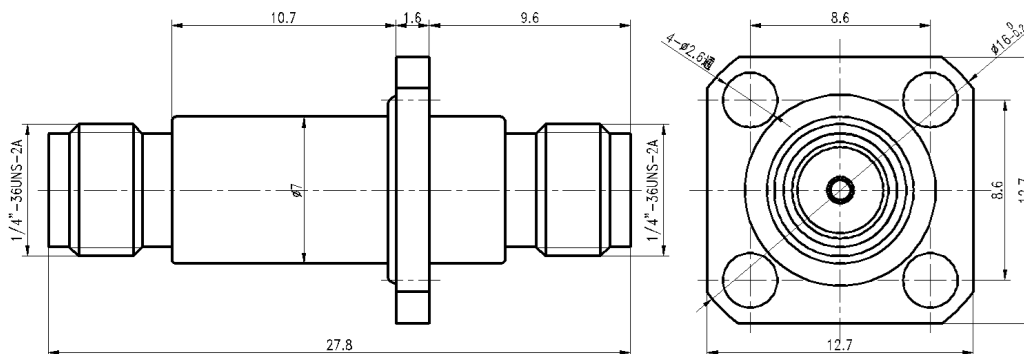

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.25dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB		

Mechanical & Product Information

Product Number	RA4001FS2, JP-Grade, Sealing ring	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PEI

Typical Test Data

