




2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001WH DC-40GHzRight Angle,

Dimensions(mm) Tolerance±1%

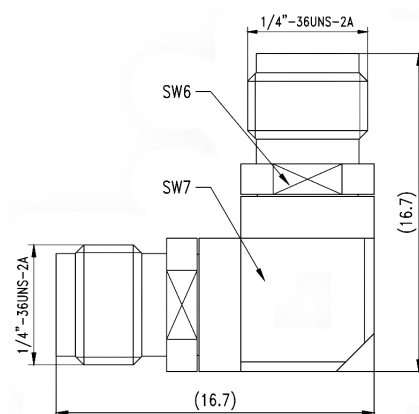

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Insertion Loss	0.40dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4001WH, JP-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Right Angle, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	16.7(L)*16.7(W)mm	Net Weight	-

Typical Test Data

