




## 2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001YH04 DC-40GHz, Bulkhead

### Dimensions(mm) Tolerance $\pm 1\%$

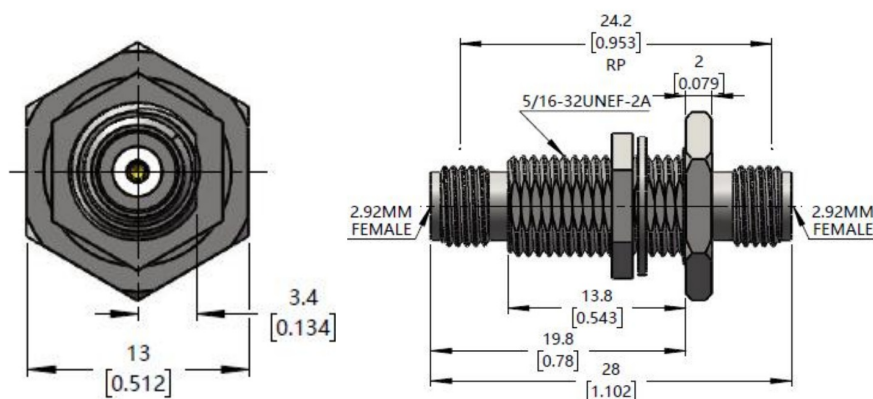

### Electrical & Environmental

|                 |          |                |            |
|-----------------|----------|----------------|------------|
| Frequency Range | DC-40GHz | Impedance      | 50 ohm     |
| VSWR            | 1.2 max  | Insertion Loss | 0.32dB max |

### Mechanical & Product Information

|                |                              |                |                                            |
|----------------|------------------------------|----------------|--------------------------------------------|
| Product Number | RA4001YH04, JP-Grade         | Connector      | 2.92mm(K,SK) Female to 2.92mm(K,SK) Female |
| Connector Body | Passivated stainless steel   | Shape/Mounting | Straight, Bulkhead                         |
| Center Contact | Gold plated beryllium copper | Insulator      | PEI                                        |
| Dimension      | 28(L)mm                      | Net Weight     | -                                          |