


2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001YH DC-40GHz, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

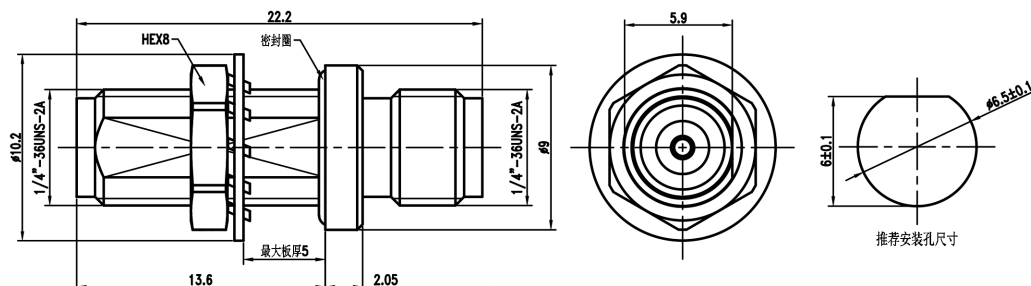

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA4001YH, JP-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, Bulkhead
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	22.2(L)*10.2(φ)mm	Net Weight	-