




2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001YSH DC-40GHz, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

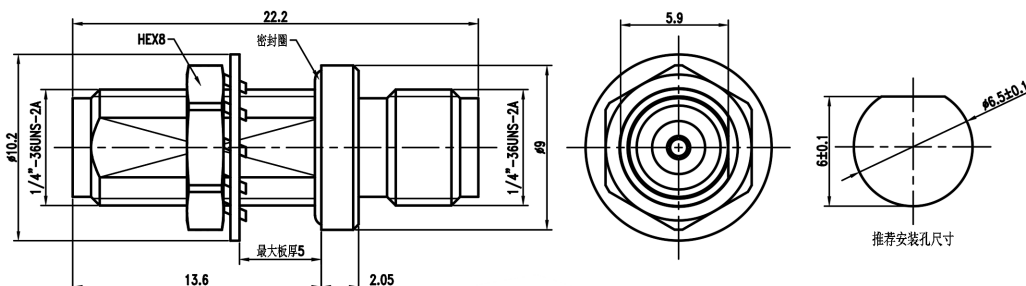

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.30dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4001YSH, U-Grade, Sealing ring	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, Bulkhead
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PEI
Dimension	22.2(L)*10.2(ϕ)mm	Net Weight	About 4.2g

Typical Test Data

