




2.92mm(K,SK) Female to 2.92mm(K,SK) Female, Adapter, RA4001 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

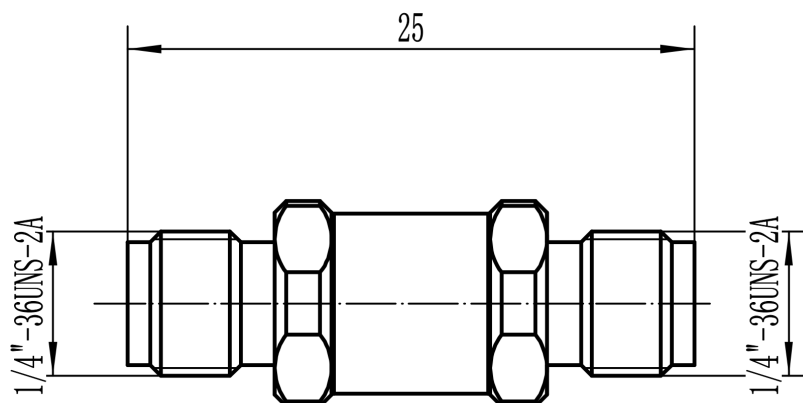

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.15	Insertion Loss	0.29dB max , Typ 0.24dB

Mechanical & Product Information

Product Number	RA4001, H-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	25(L)mm	Net Weight	-

Typical Test Data

