




2.92mm(K,SK) Male to 2.92mm(K,SK) Male, Adapter, RA4002 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

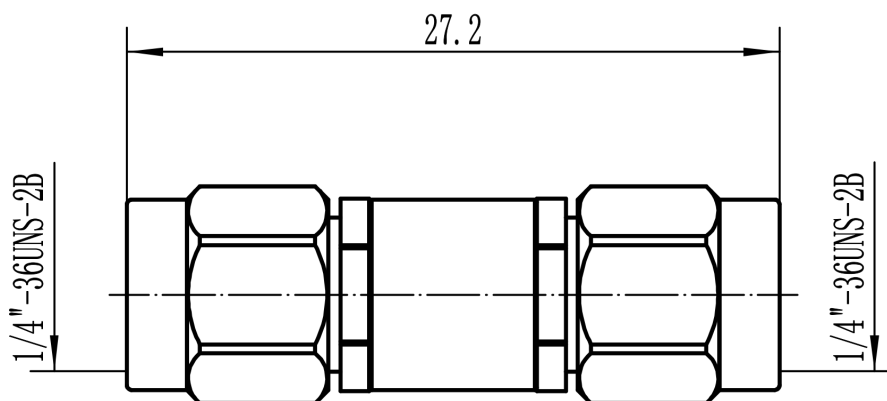

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.29dB max , Typ 0.24dB

Mechanical & Product Information

Product Number	RA4002, H-Grade	Connector	2.92mm(K,SK) Male to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	27.2(L)mm	Net Weight	-

Typical Test Data

