




2.92mm Female to 2.92mm Male, Adapter, RA4003-3 DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

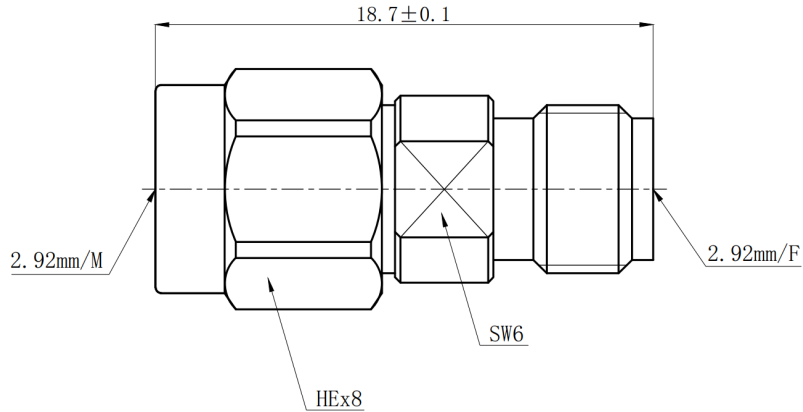

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +155°C
Insertion Loss	0.30dB max		

Mechanical & Product Information

Product Number	RA4003-3, E-Grade	Connector	2.92mm Female to 2.92mm Male
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

Typical Test Data

