




2.92mm(K,SK) Female to 2.92mm(K,SK) Male, Adapter, RA4003E DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

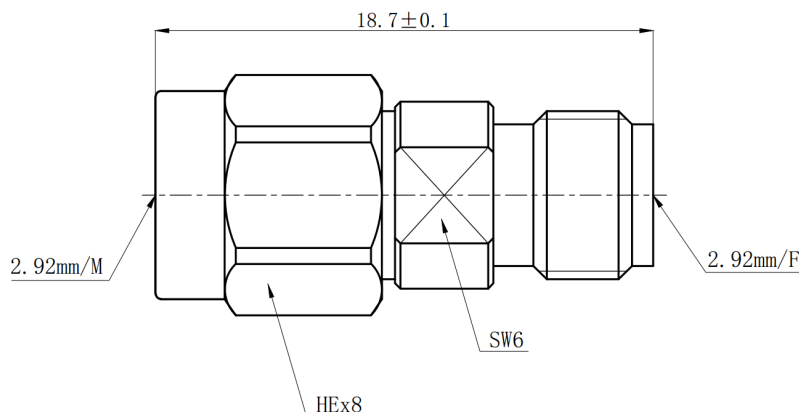

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.30dB max

Mechanical & Product Information

Product Number	RA4003E, E-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	18.7 ± 0.1 (L)mm	Net Weight	-

Typical Test Data

