


2.92mm(K,SK) Male to 2.92mm(K,SK) Female, Adapter, RA4003WH02 DC-40GHz Right Angle,

Dimensions(mm) Tolerance $\pm 1\%$

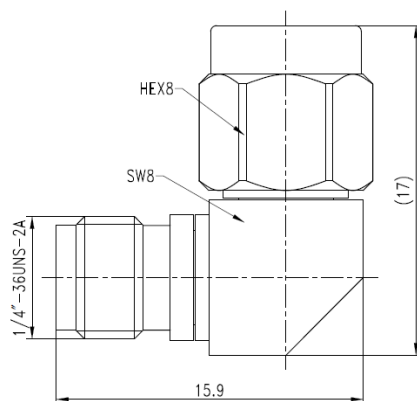

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA4003WH02, JP-Grade	Connector	2.92mm(K,SK) Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Right Angle, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	15.9(L)*17(W)mm	Net Weight	-