




2.92mm(K,SK) Male to 2.92mm(K,SK) Female, Adapter, RA4003WH DC-40GHzRight Angle,

Dimensions(mm) Tolerance±1%

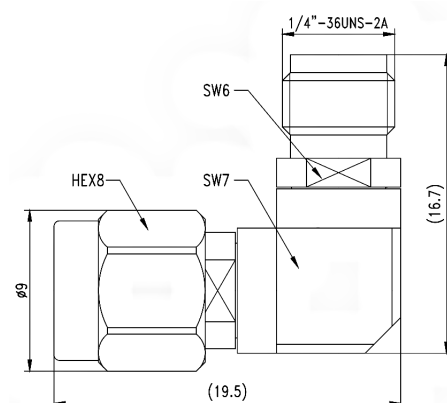

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Insertion Loss	0.35dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4003WH, JP-Grade	Connector	2.92mm(K,SK) Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Shape/Mounting	Right Angle, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	19.5(L)*16.7(W)*9(φ)mm	Net Weight	-

Typical Test Data

