




**2.92mm(K,SK) Male to 2.92mm(K,SK) Female, Adapter, RA4003YS**  
**DC-40GHz, Straight, Bulkhead**

**Dimensions(mm) Tolerance±1%**

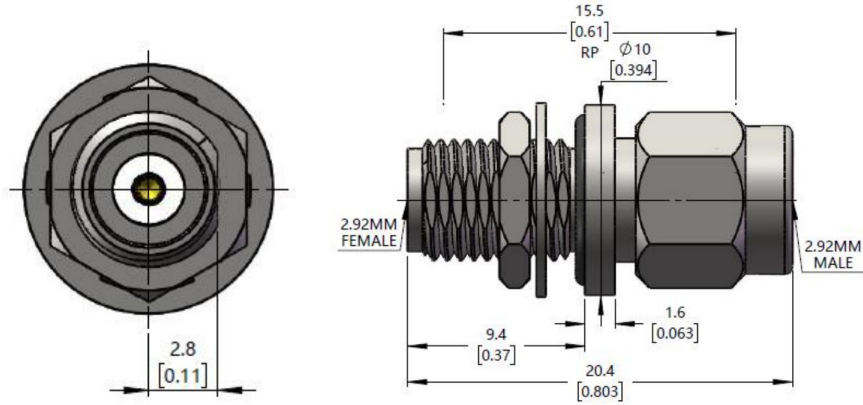

**Electrical & Environmental**

<b>Frequency Range</b>	DC-40GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.15 max	<b>Operating Temp</b>	-55°C to +165°C
<b>Insertion Loss</b>	0.32dB max		

**Mechanical & Product Information**

<b>Product Number</b>	RA4003YS, JP-Grade	<b>Connector</b>	2.92mm(K,SK) Male to 2.92mm(K,SK) Female
<b>Connector Body</b>	Passivated stainless steel	<b>Shape/Mounting</b>	Straight, Bulkhead
<b>Center Contact</b>	Gold plated beryllium copper	<b>Insulator</b>	PEI