




2.92mm(K,SK) Female to 2.92mm(K,SK) Male, Adapter, RA4003
DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

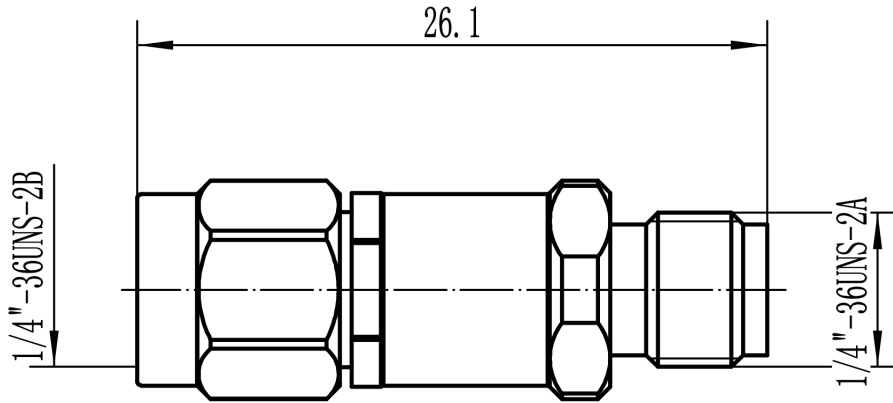

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.29dB max , Typ 0.24dB		

Mechanical & Product Information

Product Number	RA4003, H-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

Typical Test Data

