




## 2.92mm(K,SK) Female to 2.4mm Female, Adapter, RA4004 DC-40GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

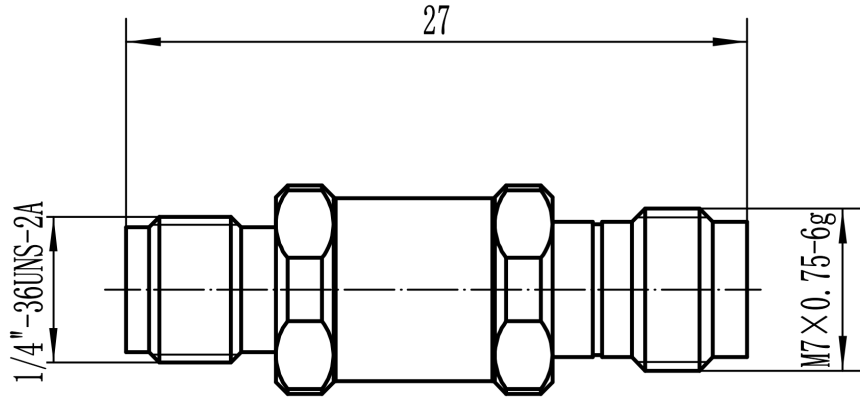

### Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.29dB max , Typ 0.24dB		

### Mechanical & Product Information

Product Number	RA4004, H-Grade	Connector	2.92mm(K,SK) Female to 2.4mm Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

### Typical Test Data

