




2.4mm Male to 2.92mm(K,SK) Female, Adapter, RA4005H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

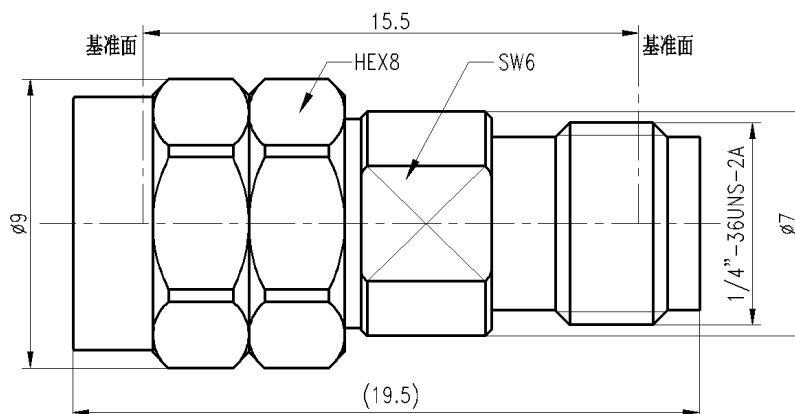

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4005H, U-Grade	Connector	2.4mm Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PEI
Dimension	19.5(L)*9(ϕ)mm	Net Weight	About 3.9g

Typical Test Data

