




2.92mm Male to 2.4mm Female, Adapter, RA4007-2 DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

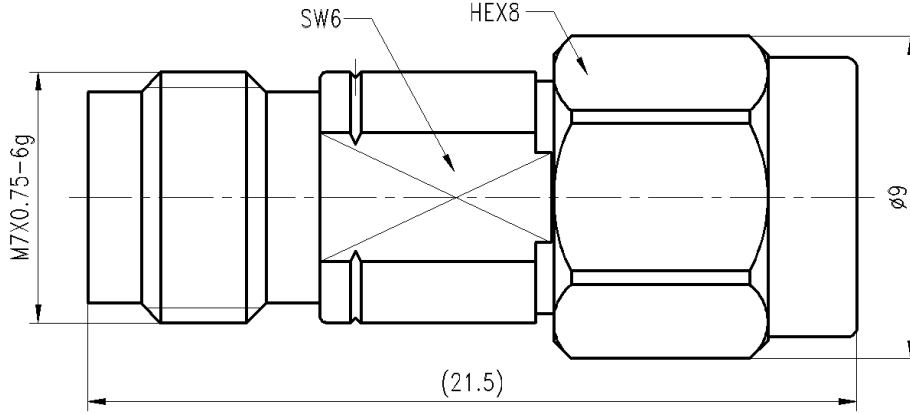

Electrical & Environmental

| | | | |
|-----------------|----------|----------------|-----------------|
| Frequency Range | DC-40GHz | Impedance | 50 ohm |
| VSWR | 1.15 max | Operating Temp | -55°C to +165°C |

Mechanical & Product Information

| | | | |
|----------------|-------------------------------------|----------------|-----------------------------|
| Product Number | RA4007-2, JP-Grade | Connector | 2.92mm Male to 2.4mm Female |
| Connector Body | Passivated stainless steel 316F | Shape/Mounting | Straight, None |
| Center Contact | 1.27um gold plated beryllium copper | Insulator | PEI |

Typical Test Data

