




2.4mm Female to 2.92mm(K,SK) Male, Adapter, RA4007WH DC-40GHzRight Angle,

Dimensions(mm) Tolerance $\pm 1\%$

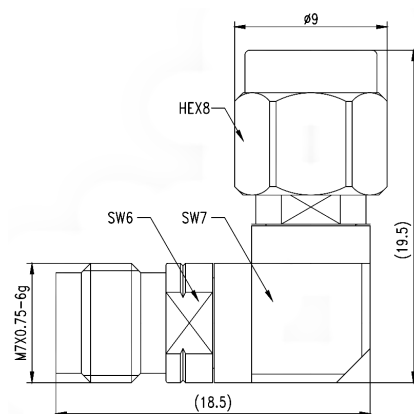

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Insertion Loss	0.40dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4007WH, JP-Grade	Connector	2.4mm Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel	Shape/Mounting	Right Angle, None
Center Contact	BeCu/Brass,Gold plating	Insulator	PTFE&PEI
Dimension	18.5(L)*19.5(W)*9(φ)mm	Net Weight	-

Typical Test Data

