




1.85mm Female to 2.92mm(K,SK) Male, Adapter, RA4009H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

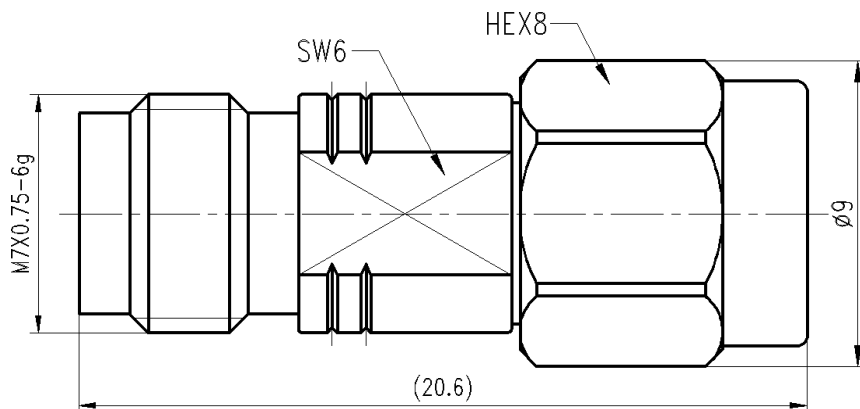


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max , Typ 1.1	Insertion Loss	0.25dB max , Typ 0.2dB; $\leq 0.04\sqrt{f(\text{GHz})}\text{dB}$

Mechanical & Product Information

Product Number	RA4009H, U-Grade	Connector	1.85mm Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27 μm gold plated beryllium copper	Insulator	PEI
Dimension	20.6(L)*9(ϕ)mm	Net Weight	-

Typical Test Data

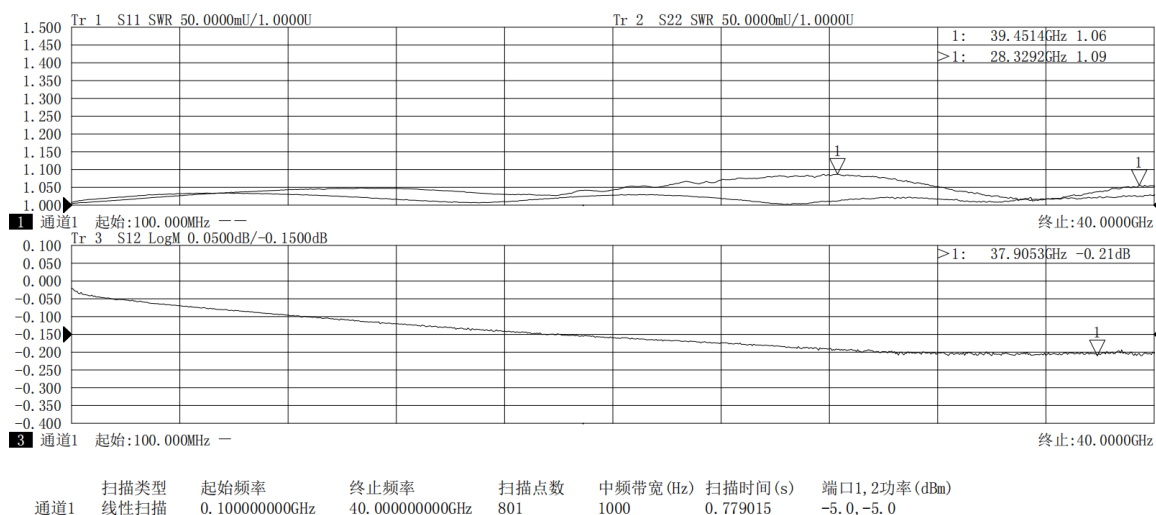



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)