




## 2.92mm Female to 1.85mm Female, Adapter, RA4010-2 DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

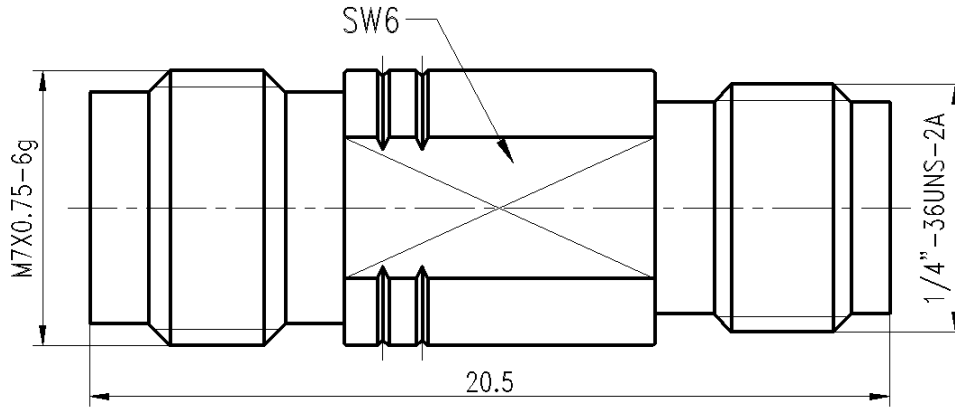

### Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB		

### Mechanical & Product Information

Product Number	RA4010-2, JP-Grade	Connector	2.92mm Female to 1.85mm Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI

### Typical Test Data

