




2.92mm(K,SK) Male to SMP(GPO) Male Limited Detent, Adapter, RA4012H DC-40GHz

Dimensions(mm) Tolerance±1%

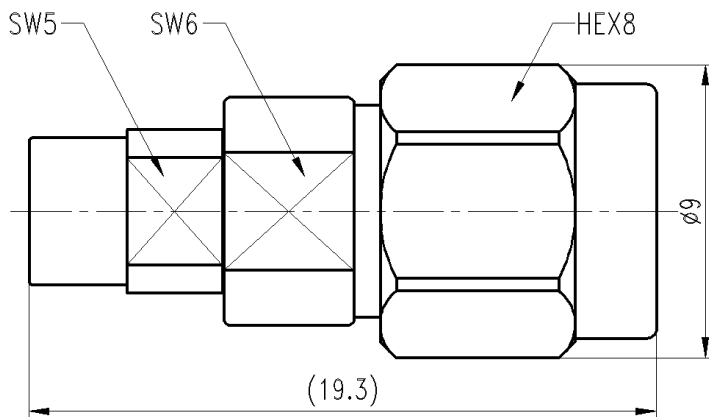

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max (互配测试)	Insertion Loss	0.40dB max , Typ 0.3dB, ≤0.12√f(GHz)dB

Mechanical & Product Information

Product Number	RA4012H, JP-Grade	Connector	2.92mm(K,SK) Male to SMP(GPO) Male Limited Detent
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	19.3(L)*9(φ)mm	Net Weight	-

Typical Test Data

