




## 2.92mm Male to SMP(GPO) Female, Adapter, RA4013-2 DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

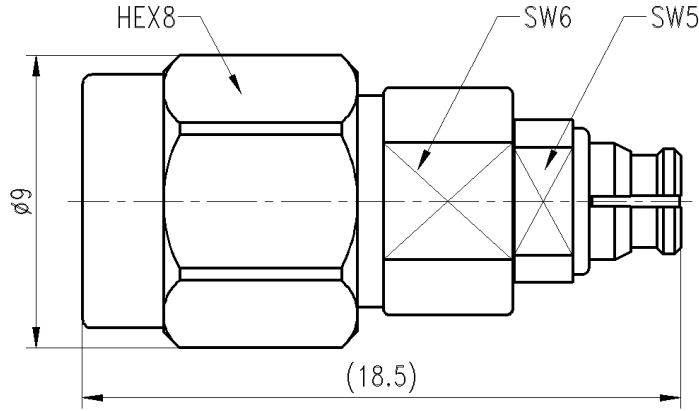


### Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max (互配测试)	Operating Temp	-55°C to +165°C
Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.12\sqrt{f(\text{GHz})}$ dB		

### Mechanical & Product Information

Product Number	RA4013-2, JP-Grade	Connector	2.92mm Male to SMP(GPO) Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE

### Typical Test Data

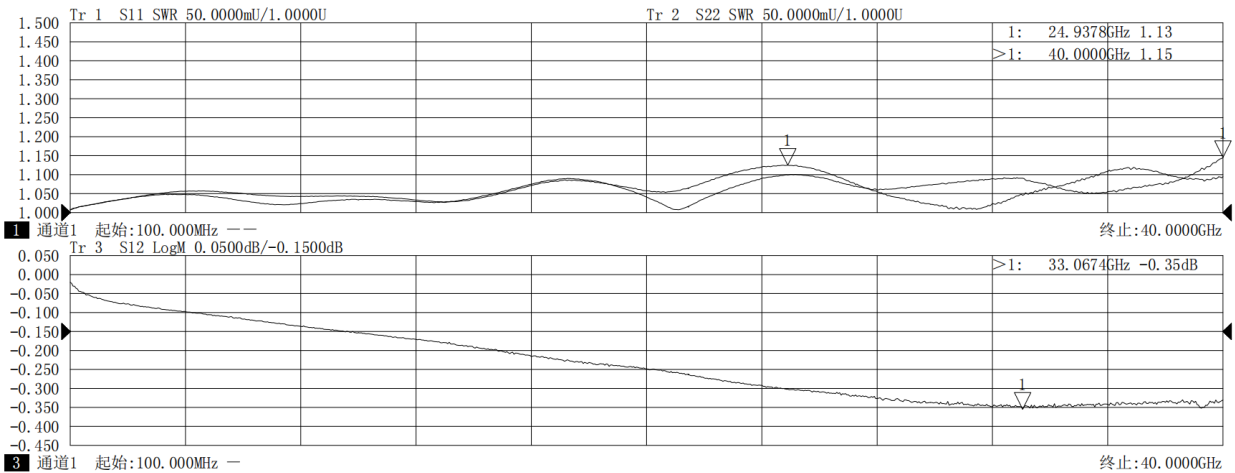

扫描类型	起始频率	终止频率	扫描点数	中频带宽(Hz)	扫描时间(s)	端口1,2功率(dBm)
通道1 线性扫描	0.100000000GHz	40.000000000GHz	801	1000	0.779015	-5.0, -5.0

