




2.92mm(K,SK) Male to SMP(GPO) Female, Adapter, RA4013H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

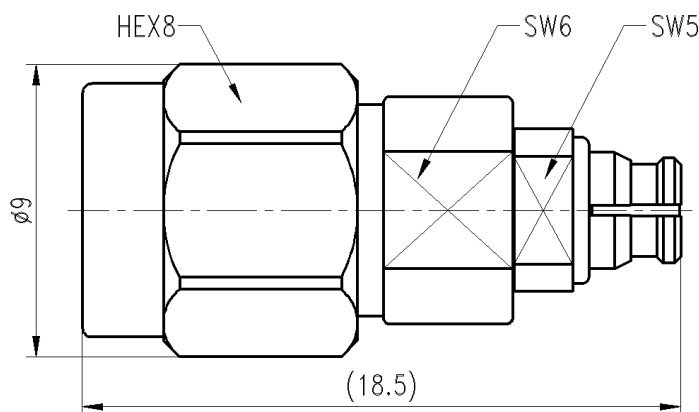

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max (互配测试)	Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.12\sqrt{f(\text{GHz})}\text{dB}$

Mechanical & Product Information

Product Number	RA4013H, JP-Grade	Connector	2.92mm(K,SK) Male to SMP(GPO) Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	18.5(L)*9(ϕ)mm	Net Weight	-

Typical Test Data

