


2.92mm Female to SMP(GPO) Male Limited Detent, Adapter, RA4014-2 DC-40GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

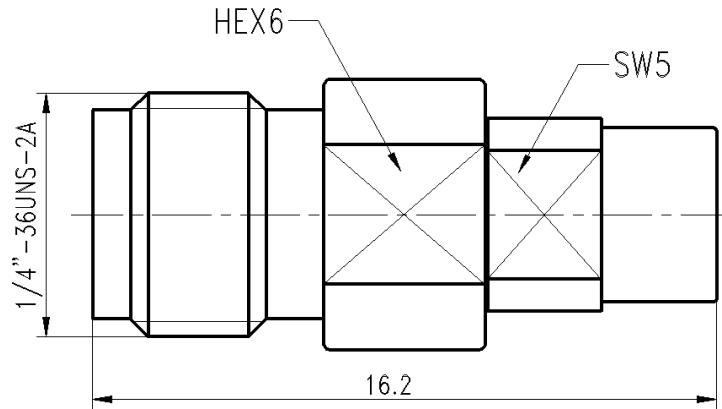

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max (互配测试)	Operating Temp	-55°C to +165°C
Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.12\sqrt{f(\text{GHz})}\text{dB}$		

Mechanical & Product Information

Product Number	RA4014-2, JP-Grade	Connector	2.92mm Female to SMP(GPO) Male Limited Detent
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE

