




2.92mm(K,SK) Female to SMP(GPO) Male Limited Detent, Adapter, RA4014H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

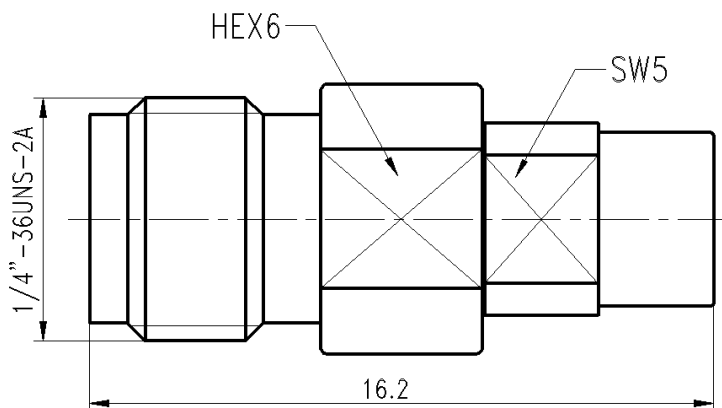


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max (互配测试)	Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.12\sqrt{f(\text{GHz})}\text{dB}$

Mechanical & Product Information

Product Number	RA4014H, JP-Grade	Connector	2.92mm(K,SK) Female to SMP(GPO) Male Limited Detent
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	16.2(L)mm	Net Weight	About 2.4g

Typical Test Data

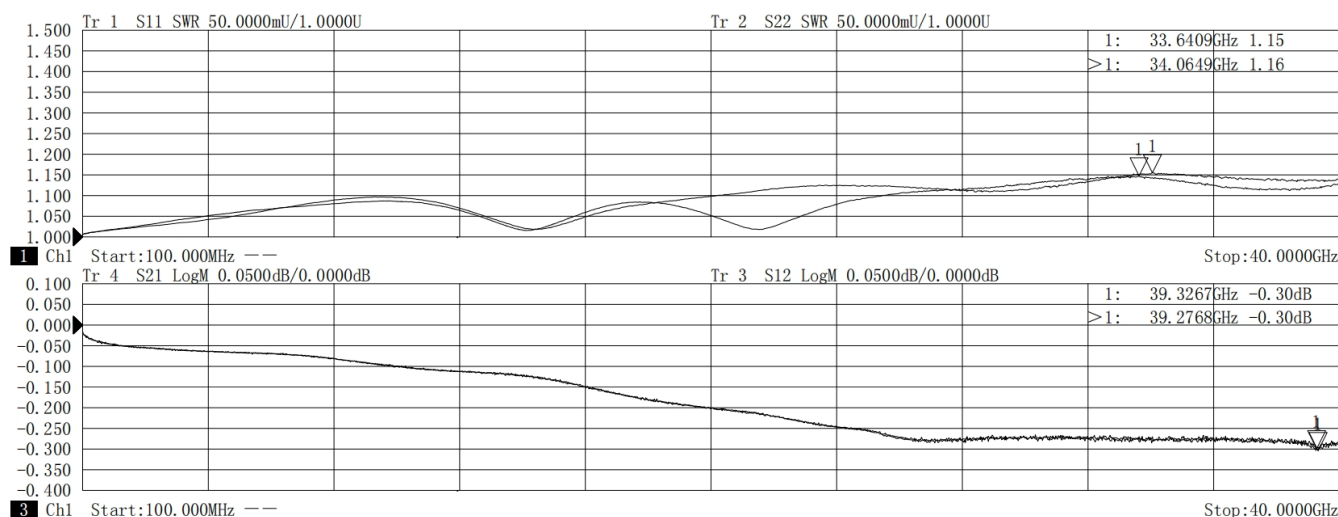



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)