


## 2.92mm Female to SMP(GPO) Female, Adapter, RA4015-2 DC-40GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

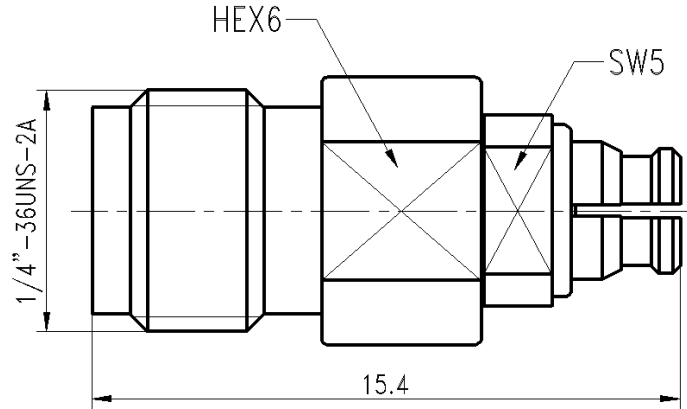

### Electrical & Environmental

<b>Frequency Range</b>	DC-40GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.2 max (互配测试)	<b>Operating Temp</b>	-55°C to +165°C
<b>Insertion Loss</b>	0.40dB max , Typ 0.3dB, $\leq 0.12\sqrt{f(\text{GHz})}$ dB		

### Mechanical & Product Information

<b>Product Number</b>	RA4015-2, JP-Grade	<b>Connector</b>	2.92mm Female to SMP(GPO) Female
<b>Connector Body</b>	Passivated stainless steel & BeCu	<b>Shape/Mounting</b>	Straight, None
<b>Center Contact</b>	Gold plated beryllium copper	<b>Insulator</b>	PEI&PTFE

