




2.92mm(K,SK) Female to SMP(GPO) Female, Adapter, RA4015 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

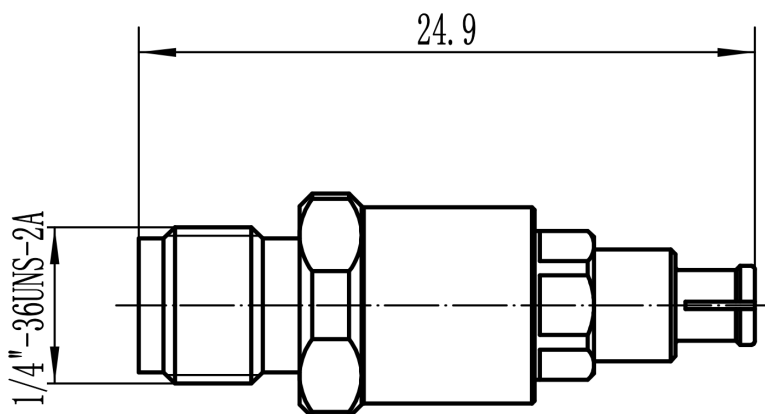

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.3 max	Insertion Loss	0.40dB max , Typ 0.3dB

Mechanical & Product Information

Product Number	RA4015, H-Grade	Connector	2.92mm(K,SK) Female to SMP(GPO) Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	24.9(L)mm	Net Weight	-

Typical Test Data

