


## 2.4mm Female to SMP(GPO) Female, Adapter, RA4019H DC-40GHz

### Dimensions(mm) Tolerance $\pm 1\%$

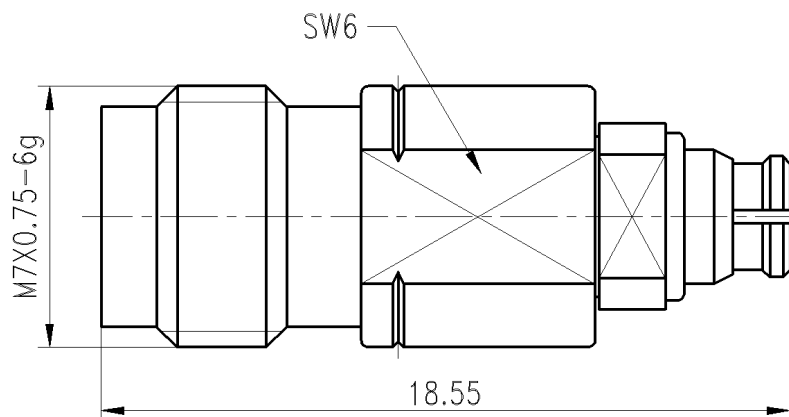

### Electrical & Environmental

|                 |                 |                |        |
|-----------------|-----------------|----------------|--------|
| Frequency Range | DC-40GHz        | Impedance      | 50 ohm |
| VSWR            | 1.25 max (互配测试) | Insertion Loss | -      |

### Mechanical & Product Information

|                |                                        |                |                                 |
|----------------|----------------------------------------|----------------|---------------------------------|
| Product Number | RA4019H, JP-Grade                      | Connector      | 2.4mm Female to SMP(GPO) Female |
| Connector Body | Passivated stainless steel 316F & BeCu | Shape/Mounting | Straight, None                  |
| Center Contact | 1.27um gold plated beryllium copper    | Insulator      | PEI                             |
| Dimension      | 18.55(L)mm                             | Net Weight     | -                               |