




2.92mm Male to SSMP Male Full Detent, Adapter, RA4020-2 DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

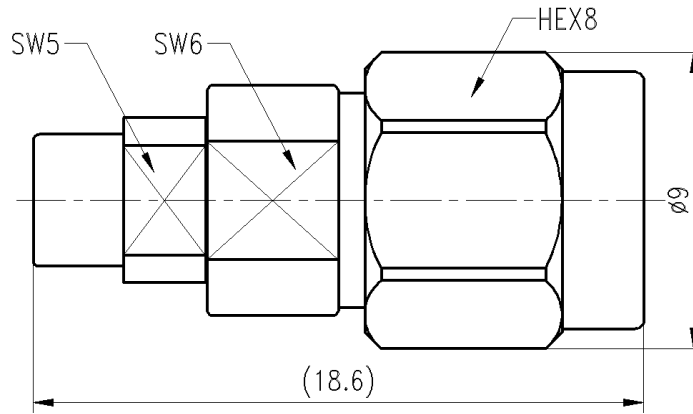


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.08\sqrt{f(\text{GHz})}$ dB		

Mechanical & Product Information

Product Number	RA4020-2, JP-Grade	Connector	2.92mm Male to SSMP Male Full Detent
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

Typical Test Data

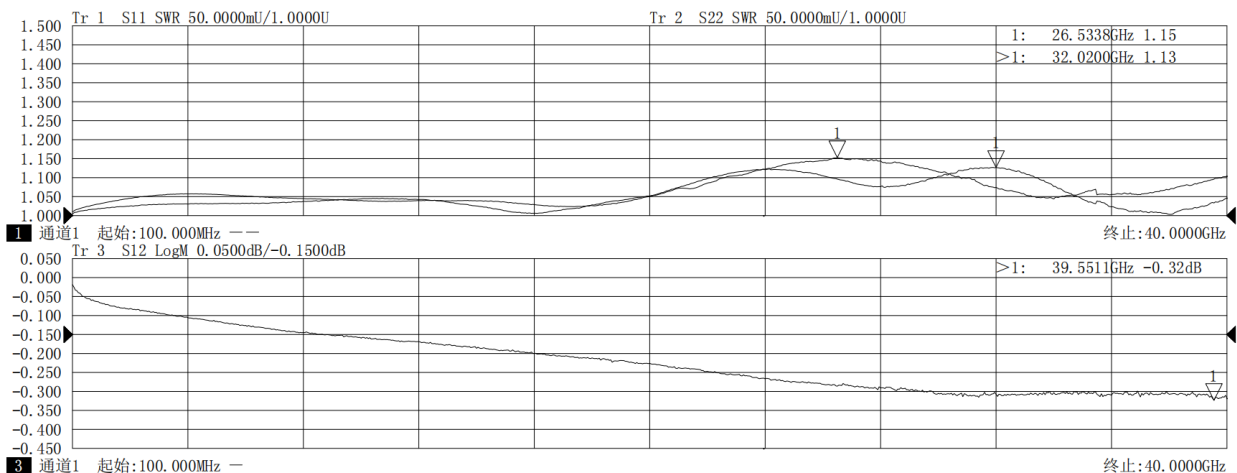

扫描类型 起始频率 终止频率 扫描点数 中频带宽(Hz) 扫描时间(s) 端口1,2功率(dBm)
通道1 线性扫描 0.100000000GHz 40.000000000GHz 801 1000 0.779015 -5.0, -5.0

